Snap-in trough │ System SP │ 91.930 │ 91.931

Trough height: 55.5mm │ Product range

For the following igus® series

E2 mini
- 10
- B15/B15i

zipper
- 15/R15

B_{Ra}
$B_{Ri} = Ba + 5$
Ba
Bi
ha
$H_{Ra} = 55.5$
12
23
90°
90°
A
4.2
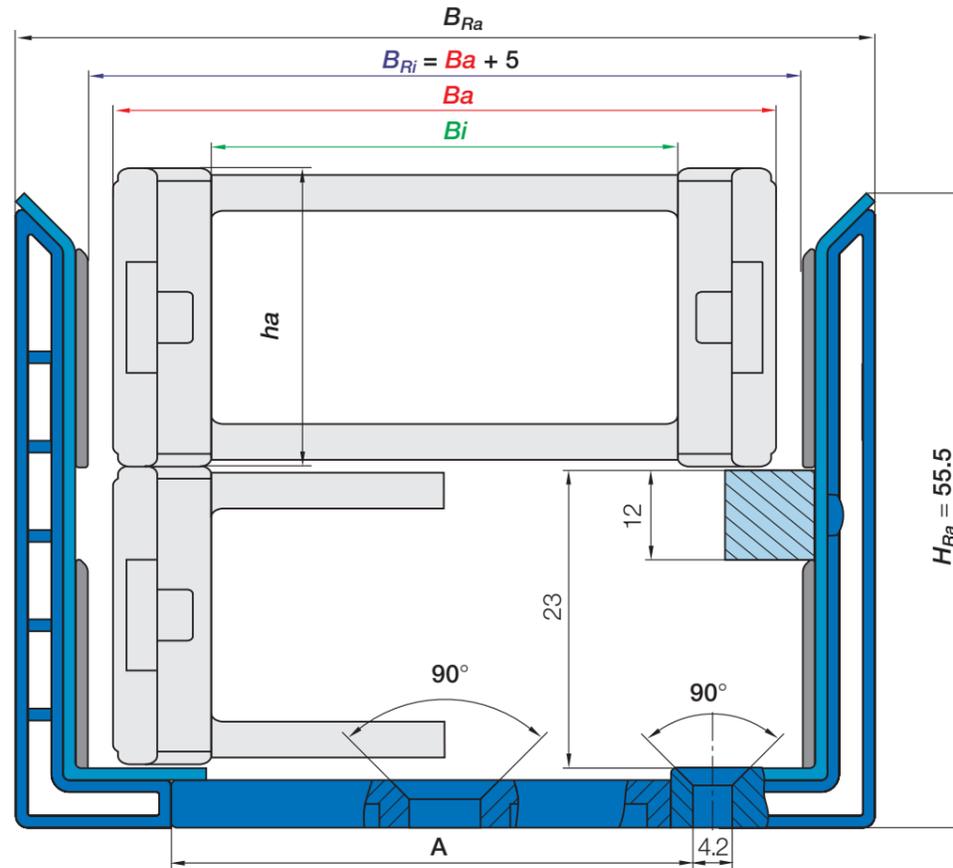
Installation dimensions

XXX	A	B_{Ra}	B_{Ri}
015	21	46	29.6
025	31	56	39.6
038	43	68	51.6
050	55	80	63.6
05	71	96	79.6
06	88	113	96.6
07	108	133	116.6

XXX = Width index

Snap-in trough │ Components

Individual parts	Part No.	Weight
Trough set **without** glide bars, 2 sections of 1m	91.930	≈ 1.50kg
Trough set **with** glide bars, 2 sections of 1m	91.931	≈ 1.90kg
Glide bar set, 2 glide bars, 1m section	91.920	
Screw set for glide bar	91.921	
Installation set **with** spacer plate	91.950.XXX	≈ 0.05kg
Installation set **without** spacer plate	91.950	≈ 0.03kg

Please add the width index XXX. Example: **91.950.050**

### 🛒 Order example: series15 for e-chain® inner width 50mm. For 20m trough the following parts are required:

10 x 1m, trough sections **without** glide bars (10 x 1m)	**91.930**
10 x 1m, trough sections **with** glide bars (10 x 1m)	**91.931**
Installation set with spacer plate (21x)	**91.950.050**

Snap-in trough │ System SP │ 92.930 │ 92.931

Trough height: 76.6mm │ Product range

For the following igus® series

E2.1
- E2.26

E2/000
- 2500
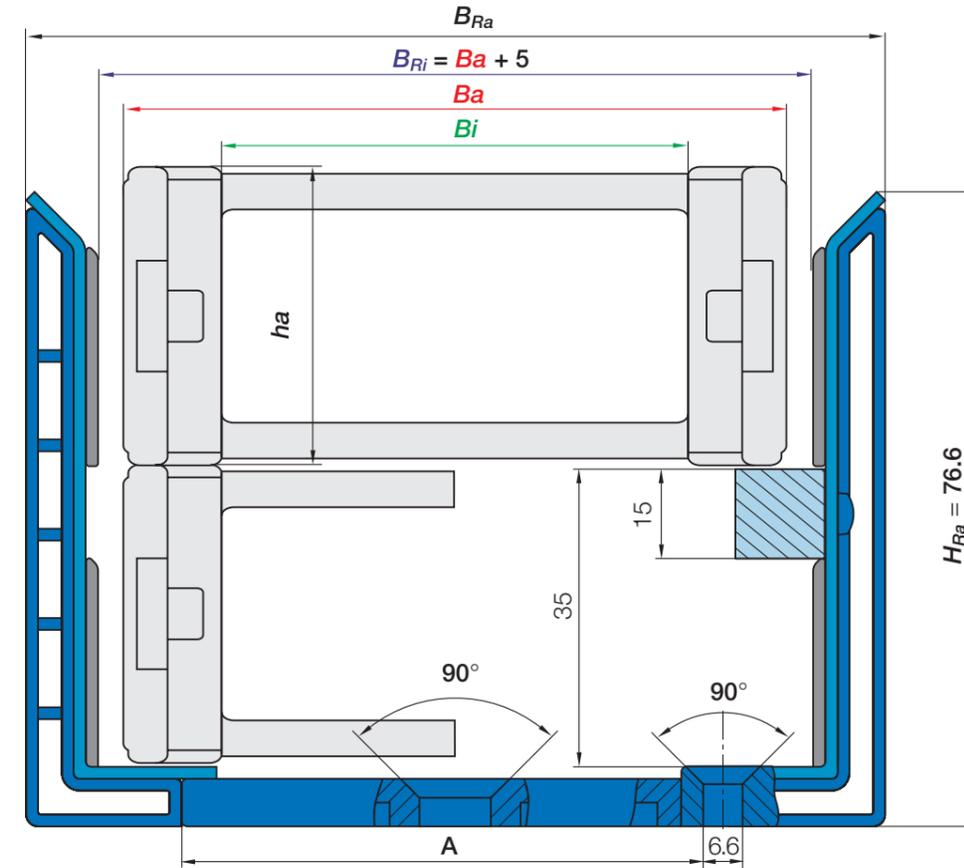
B_{Ra}
$B_{Ri} = Ba + 5$
Ba
Bi
ha
$H_{Ra} = 76.6$
15
35
90°
90°
A
6.6

Snap-in trough │ Components

Individual parts	Part No.	Weight
Trough set **without** glide bars, 2 sections of 2m	92.930	≈ 5.50kg
Trough set **with** glide bars, 2 sections of 2m	92.931	≈ 6.50kg
Glide bar set, 2 glide bars, 1m section	92.920	
Screw set for glide bar	92.921	
Installation set **with** spacer plate	92.950.XXX	≈ 0.10kg
Installation set **without** spacer plate	92.950	≈ 0.08kg

Please add the width index XXX. Example: **92.950.05**

Installation dimensions

XXX	A	B_{Ra}	B_{Ri}
02*	14	67	43
03	27	80	56
05	46	99	75
07	66	119	95
09	78	131	107
10	92	145	121
12	114	167	143

*Spacer plate upon request

XXX = Width index

🛒 Order example: series 2500 for e-chain® inner width 50mm. For 20m trough the following parts are required:

10 x 1m, trough sections **without** glide bars (5 x 2m)	**92.930**
10 x 1m, trough sections **with** glide bars (5 x 2m)	**92.931**
Installation set with spacer plate (21x)	**92.950.05**